

MULTI-CRITERIA DECISION-MAKING FOR ELECTRIC BICYCLE SELECTION

UDC:519.816:629.32

Original scientific paper

<https://doi.org/10.46793/adeletters.2022.1.4.2>

Trinh Van Huy¹, Nguyen Quang Quyet¹, Vu Huu Binh¹, Tran Minh Hoang¹, Nguyen Thi Thuy Tien¹, Le Tuan Anh¹, Dao Thi Nga¹, Nguyen Quoc Doan¹, Pham Hoang Tu¹, Do Duc Trung^{1*}

¹Faculty of Mechanical Engineering, Hanoi University of Industry, Hanoi, Vietnam

Abstract:

Electric bicycle is a vehicle which is used widely in all the cities and provinces of Vietnam. However, it's hard to choose "the most suitable" or "the best" type of electric bicycle because each type has different criteria (parameters). To choose out the best option, we need to consider all the alternatives at once. That is called multi-criteria decision-making. This research used three multi-criteria decision-making methods include *SAW* method, *MARCOS* method and *PSI* method to choose from seven best-selling types of electric bicycle on the market in 2022. All the methods which were used chose out the same best electric bicycle type and the same worst bicycle type. And so, among seven types of electric bicycle which include M133 mini, M133 Sport 2022, Aima 133AM, Nijia – PA4, DK 133M, Yadea iGo and Yadea i3, the best type is Aima 133AM, in contrast, Yadea iGo is considered the worst type. Things that need to be done in the following researches were proposed in the last part of this paper.

ARTICLE HISTORY

Received: 20.08.2022.

Accepted: 08.11.2022.

Available: 31.12.2022.

KEYWORDS

Electric bicycle selection, multi-criteria decision-making, SAW, MARCOS, PSI

1. INTRODUCTION

Nowadays, electric bicycle became one of the most prioritized vehicles used in all over Vietnam. This type of vehicle is considered suitable for many classes of people, many ages. Using electric bicycles not only reduce the pollution level, the rate of accidents compared to motobikes, but also increase users health. On the other hand, in the context of many changes in gasoline prices in the world, electric bicycle is known as a significant solution in saving money for moving activities. From this fact, in recent years, there are many types of electric bicycle represented on the market to satisfy customers. However, because of that, customers may be confused about choosing a type that is considered the most suitable. We can say so because if a customer want to choose an electric bicycle, there will be many parameters (criteria) that need to be considered, such as price, vehicle load, charging time, the distance that bicycle can go

after each charge, maximum speed, etc. Nevertheless, the values of the parameters in each electric bicycle type are not the same, sometimes contradictory, for example, a bicycle which has low price, may have low maximum speed or low vehicle load. An electric bicycle selection based on subjective opinions of a customer about a random alternative may lead to to unsuitable selection. Multi-Criteria Decision-Making (*MCDM*) to choose the best alternative from the available alternatives is a task in all different areas. Choosing a type of electric bicycle from many available types on the market, therefore, need to apply this technique as well. Up to this time, no studies have been found that have done this.

Through the time, many different *MCDM* methods were proposed by scientists such as: Simple Additive Weighting (*SAW*), Measurement Alternatives and Ranking according to Compromise Solution (*MARCOS*), Preference selection index (*PSI*), Weighted Aggregates Sum Product Assessment

(WASPAS), Multiobjective Optimization On the basis of Ratio Analysis (MOORA), Complex Proportional Assessment (COPRAS), Technique for Order Preference by Similarity to Ideal Solution (TOPSIS), etc. In certain conditions, using these methods may give different results. Therefore, to make sure an alternative is considered the best alternative, scientists usually use more than one method simultaneously [1].

Ranking to select the best electric bicycle in this research is done by using 3 different methods, including SAW method, MARCOS method, PSI method. The reason these methods are used is:

SAW is known as the oldest method (1964), it is considered the foundation for Scientists to propose other methods [1]. It is also considered a widely used method because of its simplicity [2-6]. For the reason, the method may be oldest, but it is still used in the recent researches, such as: evaluating flood control projects [7], air-conditioner selection [8], school selection [9, 10], evaluating national football teams participating in the 2018 World Cup [11], selecting students to receive grants [12], recruiting University teachers [13], ranking teachers of a secondary school [14], ranking singers of a band [15], assessing the sustainability of real estate [16], industrial robot selection, flexible manufacturing systems (FMS) selection, and non-traditional machining methods selection [17], etc.

MARCOS is a method that was found recently (2020) [18] with many proven advantages: high stability in ranking alternatives, possibility to determine the best solution regardless of the number of alternatives and weight determination method [19]. This method is also used widely to rank alternatives in many different areas: ranking project management softwares [20], ranking the quality of electronic services in the aviation industry [21], ranking planes for domestic flights in Turkey [22], ranking logistics efficiency of countries [23], ranking efficiency of railway systems [24], ranking forklift [25], ranking refractory supplier in the iron and steel industry in India [26], etc.

PSI is a method proposed in 2018 with a special feature which is different from SAW method and MARCOS method, this method does not need to determine weights for criteria [27]. This method is also used to rank the alternatives in many different areas: evaluating performances of machines [28], offering a plan to recover waste from electrical/electronic products [29], choosing a method to develop an automated system in selecting students who are eligible for scholarship [30], making decisions in choosing materials to

recover/beautify teeth [31], choosing the life cycle design option of the production system [32], making selection for technological parameters for the turning process [33], choosing the parameters for the spark machining process [34], choosing the parameters for the grinding process [35], ranking the efficiency of production chains [36], ranking materials for engineering [37], ranking individuals who are eligible for credit loans in Indonesia [38], selecting a location for old computer store [39], comparing the tourism potential of several countries [40], selecting machine in manufacturing companies [41], etc.

Using three different MCDM methods with different features (SAW – the oldest method, MARCOS – the method which was found recently and PSI – the method does not need to determine weights for criteria) for the purpose of making the results of ranking the alternatives in the most objective way. This is a new feature of this study compared with other published papers. The steps to rank the alternatives according to these three methods are presented in the second part of the paper. The ranking of electric bicycles is presented in the third part of this study. The discussion about the results and the conclusions drawn is the last content to end this study.

2. SOME MULTI-CRITERIA DECISION MAKING METHODS

2.1. SAW method

The steps for implementation of multi-criteria decision-making according to the SAW method are as follows [42]:

Step 1: Build a decision matrix with m alternatives ($A_1 \div A_m$) and n criteria ($C_1 \div C_n$) as the table 1. If the criterion is the larger the better, it is called a B type criterion. In contrast, if the criterion is the smaller the better, it is called a C type criterion. Where y_{ij} denotes the performance value of j^{th} alternative on j^{th} criterion.

Step 2: Calculate the normalized decision matrix by using the following formula.

$$n_{ij} = \frac{y_{ij}}{\max y_{ij}} \quad \text{if } j \in B \quad (1)$$

$$n_{ij} = \frac{\min y_{ij}}{y_{ij}} \quad \text{if } j \in C \quad (2)$$

Table 1. Decision matrix

Alternatives	C_1	C_2	C_j	C_{n-1}	C_n
A_1	y_{11}	y_{12}	y_{1j}	y_{1n-1}	y_{1n}
A_2	y_{21}	y_{22}	y_{2j}	y_{2n-1}	y_{2n}
A_i	y_{i1}	y_{i2}	y_{ij}	y_{in-1}	y_{in}
A_{m-1}	y_{m-11}	y_{m-12}	y_{m-1j}	y_{m-1n-1}	y_{m-1n}
A_m	y_{m1}	y_{m2}	y_{mj}	y_{mn-1}	y_{mn}

Step 3: Calculate criteria functions of the alternatives V_i .

$$V_i = \sum_{j=1}^n w_j \cdot n_{ij} \quad (3)$$

Where w_j is the weight of the criterion j .

Step 4: Rank the alternatives according to the rule that the alternative with the highest V_i is considered the best.

2.2. MARCOS method

The steps for implementation of multi-criteria decision-making according to the MARCOS method are as follows [18]:

Step 1: Similar to Step 1 of SAW method.

Step 2: Adding the ideal (AI) and anti-ideal solution (AAI) to the initial decision-making matrix to create an extended initial matrix.

$$Y = \begin{matrix} AAI \\ A_1 \\ A_2 \\ \vdots \\ A_m \\ AI \end{matrix} \begin{bmatrix} y_{aa1} & \cdots & y_{aan} \\ y_{11} & \cdots & y_{1n} \\ y_{21} & \cdots & y_{2n} \\ \vdots & \vdots & \vdots \\ y_{m1} & \cdots & y_{mn} \\ y_{ai1} & \cdots & y_{ain} \end{bmatrix} \quad (4)$$

Wherein:

- If $j \in B$

$$AAI = \min(y_{ij}); i = 1, 2, \dots, m; j = 1, 2, \dots, n.$$

$$AI = \max(y_{ij}); i = 1, 2, \dots, m; j = 1, 2, \dots, n.$$

- If $j \in C$

$$AAI = \max(y_{ij}); i = 1, 2, \dots, m; j = 1, 2, \dots, n.$$

$$AI = \min(y_{ij}); i = 1, 2, \dots, m; j = 1, 2, \dots, n.$$

Step 3: Normalizing the expanded initial matrix by using the following formula.

- If $j \in C$

$$u_{ij} = \frac{y_{AI}}{y_{ij}} \quad (5)$$

- If $j \in B$

$$u_{ij} = \frac{y_{ij}}{y_{AI}} \quad (6)$$

Step 4: Creating a weighted normalized matrix by using the following formula.

$$c_{ij} = u_{ij} \cdot w_j \quad (7)$$

Step 5: Determining the utility degree of alternatives K_i^+ và K_i^- by using the following formula:

$$K_i^- = \frac{S_i}{S_{AAI}} \quad (8)$$

$$K_i^+ = \frac{S_i}{S_{AI}} \quad (9)$$

Where:

S_i, S_{AAI} and S_{AI} represent the sum of the values of C_{ij}, y_{aai} and y_{ai} , where $i = 1, 2, \dots, m$.

Step 6: Calculate the functions $f(K_i^+)$ and $f(K_i^-)$ according to the formula:

$$f(K_i^-) = \frac{K_i^+}{K_i^+ + K_i^-} \quad (10)$$

$$f(K_i^+) = \frac{K_i^-}{K_i^+ + K_i^-} \quad (11)$$

Step 7: Calculating the function $f(K_i)$ of the alternatives according to the formula.

$$f(K_i) = \frac{K_i^+ + K_i^-}{1 + \frac{1 - f(K_i^+)}{f(K_i^+)} + \frac{1 - f(K_i^-)}{f(K_i^-)}} \quad (12)$$

Step 8: Rank the alternatives according to the rule that the alternative with the highest $f(K_i)$ is considered the best.

2.3. PSI method

The steps for implementation of multi-criteria decision-making according to the PSI method are as follows [27].

Step 1: Similar to Step 1 of SAW method.

Step 2: The data normalization.

- If $j \in B$

$$n_{ij} = \frac{y_{ij}}{\max y_{ij}} \quad (13)$$

- If $j \in C$

$$n_{ij} = \frac{\min y_{ij}}{y_{ij}} \quad (14)$$

Step 3: Calculate the average values of the normalized data.

$$n = \frac{1}{n} \sum_{i=1}^n n_{ij} \quad (15)$$

Step 4: Determine the preference value.

$$\phi_j = \sum_{i=1}^n [n_{ij} - n]^2 \quad (16)$$

Step 5: Determine the deviation of the preference value.

$$\phi_j = [1 - \varphi_j] \quad (17)$$

Step 6: Determine overall preference value.

$$\beta_j = \frac{\phi_j}{\sum_{j=1}^m \phi_j} \quad (18)$$

Step 7: Calculate the selection index θ_i for each criteria.

$$\theta_j = \sum_{j=1}^m n_{ij} \cdot \beta_j \quad (19)$$

Step 8: Rank the alternatives according to the rule that the alternative with the highest θ_i is considered the best.

3. MULTI-CRITERIA DECISION MAKING FOR ELECTRIC BICYCLE

3.1. Parameters of electric bicycle

To choose out the type of electric bicycle which is considered “the best”, we need to consider many parameters (also called criteria to evaluate each electric bicycle type) such as price, maximum speed, charging time, etc. Table 2 presents the basic parameters of seven best-selling types of electric bicycle in 2022 [43].

Seven available types of bicycle to choose include (Fig. 1) [43]:

- Alternative 1 (A1): M133 mini electric bicycle;
- Alternative 2 (A2): M133 Sport 2022 electric bicycle;
- Alternative 3 (A3): Aima 133AM electric bicycle;
- Alternative 4 (A4): Nijia electric bicycle;
- Alternative 5 (A5): DK 133M electric bicycle;
- Alternative 6 (A6): Yadea iGo electric bicycle;
- Alternative 7 (A7): Yadea i3 electric bicycle.

Ten criteria used to evaluate for each type:

- Criterion 1 (C1): Price (đ);
- Criterion 2 (C2): Distance (km/1 charge);
- Criterion 3 (C3): Charging time (hour);
- Criterion 4 (C4): Maximum speed (km/h);
- Criterion 5 (C5): bicycle weight (kg);
- Criterion 6 (C6): bicycle load (kg);
- Criterion 7 (C7): Saddle height (mm);
- Criterion 8 (C8): Overall length of bicycle (mm);
- Criterion 9 (C9): Overall width of bicycle (mm);
- Criterion 10 (C10): Overall height of bicycle (mm).

Among ten criteria mentioned above, C1 and C3 are C type criteria, in opposition, the other criteria are B type criteria.

Table 1 presents the criteria of each electric bicycle type [43].



A1) M133 mini



A2) M133 Sport 2022



A3) Aima 133AM



A4) Nijia



A5) DK 133M



A6) Yadea iGo



A7) Yadea i3

Fig.1. Some electric bicycle types [43]

The parameters in Table 2 show that it is very hard to determine an alternative that ensures both C1 and C3 are absolutely smallest and the other alternatives (C2, C4, C5, C6, C7, C8, C9 and C10) are absolutely largest. Some examples will prove that the statement is correct.

For example, the alternative A1 shows that: C1 is the smallest; C3 is also the smallest (equal to C3 of the alternatives from A2 to A6); C4 is the largest (equal to C4 of the alternatives from A2 to A5); C5 is the largest; C7 is the largest (equal to C7 of the alternatives from A2 to A5). But C2 of A1 is smaller than C2 of the alternatives A3, A4 and A5; C6 of A1 is smaller than C6 of the alternatives A3, A4 and A5; C8 of A2 is smaller than C8 of the alternatives A3, A4 and A5; C9 of A1 is smaller than all the others C9; C10 of A1 is also smaller than C10 of the alternatives from A1 to A6.

Another example, the alternative A2 shows that: C3 is the smallest; other criteria C4, C7, C8 and C10 are the largest. But C1 of A2 is larger than C1 of A1; C2 of A2 is smaller than C2 of the alternatives from A3 to A5; C5 of A2 is smaller than C5 of A1; C6 of A2 is smaller than C6 of the alternatives A1, A3, A4 and A5; C9 of A2 is smaller than C9 of A6 and A7.

After considering all the other alternatives, the results are not different, which means, it is not possible to choose out an alternative which can be considered “the best” only base on the parameters from Table 2. To solve this problem, it is necessary to apply mathematical tools to choose the best alternative. SAW method, MARCOS method and PSI method will be used one after another to rank the electric bicycle types. However, determining the weights of criteria must be done before ranking the alternatives.

Table 2. Some parameters of electric bicycle [43]

Alternatives	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
A1	7500000	45	7	35	56	160	750	1593	635	1015
A2	7900000	45	7	35	50	150	750	1640	640	1200
A3	9900000	50	7	35	50	180	750	1640	640	1200
A4	9900000	50	7	35	46	180	750	1640	640	1200
A5	11500000	50	7	35	52	180	750	1640	640	1200
A6	13990000	45	7	30	45	75	550	1550	650	1040
A7	13990000	45	8	30	45	75	600	1530	750	1000

3.2. Determining the weights of criteria

To choose an alternative that is considered the best among alternatives, at first, we have to determine the weights of the criteria used to evaluate the alternatives [1]. Determining the weights of criteria can be done by different methods: according to the subjective opinion of the decision maker, calculating the weights of criteria by using the EQUAL method, the RS method, the ROC method, the ENTROPY method, the MEREC method, the APH method, etc. This study used the simplest method to calculate the weights of criteria, EQUAL method.

EQUAL method is a weighting method done by using the following formula [44].

$$w_j = \frac{1}{n} \tag{20}$$

Where, *n* is the number of criteria.

Calculating the weights of the criteria from C1 to C10 of Table 2 by using EQUAL method according to the formula (20) and we have the result:

$$w_1 = w_2 = \dots = w_8 = w_9 = w_{10} = \frac{1}{10} = 0.1$$

3.3. Applying the SAW method

Construct a decision matrix, this matrix is the table of the seven electric bicycle types (Table 2).

Applying the formulas (1) and (2) to determine the normalized values of the parameters in Table 3.

Table 3. Normalized values of the parameters according to SAW method

Alternatives	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
A1	1.000	0.900	1.000	1.000	1.000	0.889	1.000	0.971	0.847	0.846
A2	0.949	0.900	1.000	1.000	0.893	0.833	1.000	1.000	0.853	1.000
A3	0.758	1.000	1.000	1.000	0.893	1.000	1.000	1.000	0.853	1.000
A4	0.758	1.000	1.000	1.000	0.821	1.000	1.000	1.000	0.853	1.000
A5	0.652	1.000	1.000	1.000	0.929	1.000	1.000	1.000	0.853	1.000
A6	0.536	0.900	1.000	0.857	0.804	0.417	0.733	0.945	0.867	0.867
A7	0.536	0.900	0.875	0.857	0.804	0.417	0.800	0.933	1.000	0.833

Table 4. V_i values of the alternatives and rank of the alternatives

Alternatives	V_i	Rank
A1	0.9453	2
A2	0.9429	5
A3	0.9504	1
A4	0.9432	4
A5	0.9434	3
A6	0.7925	7
A7	0.7955	6

Applying the formula (3) to calculate the values of V_i and the results are in Table 4. The results of ranking the alternatives according to V_i are presented in the table.

Table 5. Normalized values of the parameters according to MARCOS method

Alternatives	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
A1	0.536	0.900	0.875	0.857	0.804	0.417	0.733	0.933	0.847	0.833
A2	1.000	0.900	1.000	1.000	1.000	0.889	1.000	0.971	0.847	0.846
A3	0.949	0.900	1.000	1.000	0.893	0.833	1.000	1.000	0.853	1.000
A4	0.758	1.000	1.000	1.000	0.893	1.000	1.000	1.000	0.853	1.000
A5	0.758	1.000	1.000	1.000	0.821	1.000	1.000	1.000	0.853	1.000
A6	0.652	1.000	1.000	1.000	0.929	1.000	1.000	1.000	0.853	1.000
A7	0.536	0.900	1.000	0.857	0.804	0.417	0.733	0.945	0.867	0.867

Table 6. Weighted normalized values of the parameters according to MARCOS method

Alternatives	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
A1	0.100	0.090	0.100	0.100	0.100	0.089	0.100	0.097	0.085	0.085
A2	0.095	0.090	0.100	0.100	0.089	0.083	0.100	0.100	0.085	0.100
A3	0.076	0.100	0.100	0.100	0.089	0.100	0.100	0.100	0.085	0.100
A4	0.076	0.100	0.100	0.100	0.082	0.100	0.100	0.100	0.085	0.100
A5	0.065	0.100	0.100	0.100	0.093	0.100	0.100	0.100	0.085	0.100
A6	0.054	0.090	0.100	0.086	0.080	0.042	0.073	0.095	0.087	0.087
A7	0.054	0.090	0.088	0.086	0.080	0.042	0.080	0.093	0.100	0.083

Table 7. Other parameters in MARCOS and rank of the alternatives

Alternatives	K_i^+	K_i^-	$f(K_i^-)$	$f(K_i^+)$	$f(K_i)$	Rank
A1	1.25958×10^{-7}	6.75488×10^{-8}	0.6509	0.3491	3.74449×10^{-14}	2
A2	1.2564×10^{-7}	6.73785×10^{-8}			3.72563×10^{-14}	5
A3	1.26638×10^{-7}	6.79135×10^{-8}			3.78503×10^{-14}	1
A4	1.25686×10^{-7}	6.74031×10^{-8}			3.72835×10^{-14}	4
A5	1.25709×10^{-7}	6.74156×10^{-8}			3.72973×10^{-14}	3
A6	1.05604×10^{-7}	5.66337×10^{-8}			2.63212×10^{-14}	7
A7	1.05997×10^{-7}	5.68443×10^{-8}			2.65173×10^{-14}	6

3.5. Applying the PSI method

Construct a decision matrix, this matrix is the table of the seven electric bicycle types (Table 2).

Applying the formulas (13) and (14) to determine the normalized values of the parameters in Table 8.

3.4. Applying the MARCOS method

Construct a decision matrix, this matrix is the table of the seven electric bicycle types (table 2).

Applying the formulas (4), (5) and (6) to determine the normalized values of the parameters in Table 5.

The weighted normalized values of the criteria are calculated by using the formula (7) and we get the results in Table 6.

The parameters K_i^+ , K_i^- , $f(K_i^-)$, $f(K_i^+)$ and $f(K_i)$ are calculated correspondingly by the formulas (8), (9), (10), (11) and (12), and we get the results in Table 7. The results of ranking the alternatives according to the values of $f(K_i)$ are also presented in this table.

Applying the formulas (15), (16) and (17) to determine the values of φ and \varnothing in Table 9.

Applying the formulas (18) and (19) to determine the values of θ in Table 10. The results of ranking the alternatives according to the values of θ are also presented in this table.

Table 8. Normalized values of the parameters according to the PSI method

Alternatives	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
A1	1.865	0.900	1.000	1.000	1.000	0.889	1.000	0.971	0.847	0.846
A2	1.771	0.900	1.000	1.000	0.893	0.833	1.000	1.000	0.853	1.000
A3	1.413	1.000	1.000	1.000	0.893	1.000	1.000	1.000	0.853	1.000
A4	1.413	1.000	1.000	1.000	0.821	1.000	1.000	1.000	0.853	1.000
A5	1.217	1.000	1.000	1.000	0.929	1.000	1.000	1.000	0.853	1.000
A6	1.000	0.900	1.000	0.857	0.804	0.417	0.733	0.945	0.867	0.867
A7	1.000	0.900	0.875	0.857	0.804	0.417	0.800	0.933	1.000	0.833

Table 9. Values of φ and \varnothing of the criteria according to the PSI method

Parameters	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10
φ	0.706	0.017	0.013	0.029	0.032	0.423	0.080	0.005	0.018	0.040
\varnothing	0.294	0.983	0.987	0.971	0.968	0.577	0.920	0.995	0.982	0.960

Table 10. Values of θ_i of the alternatives and rank of the alternatives

Alternatives	θ	Rank
A1	0.9728	5
A2	0.9750	4
A3	0.9854	1
A4	0.9774	3
A5	0.9827	2
A6	0.8468	7
A7	0.8497	6

And so, ranking the electric bicycle types according to the SAW method, MARCOS method and PSI method is done. Table 11 is the results of ranking the electric bicycle types according to these three methods. To make it easy to observe the results, the values in Table 11 are showed on a chart like Fig. 2.

By observing the results in Table 11 and Fig. 2, we can see:

Table 11. Ranking the electric bicycle types according to three different methods

Alternatives	SAW	MARCOS	PSI
A1	2	2	5
A2	5	5	4
A3	1	1	1
A4	4	4	3
A5	3	3	2
A6	7	7	7
A7	6	6	6

- The ranking results according to SAW method and MARCOS method are the same.

- Although the ranking results according to the PSI method have some differences compared to the other methods (SAW and MARCOS), but all three of them show that A3 is ranked first (the best one), A7

ranked sixth, and A6 ranked seventh (the worst one). So we can come to a conclusion that A3 is the best alternative, and A6 is the worst one. In other words, among seven electric bicycle types mentioned in this study, Aima 133AM is the best electric bicycle type, and on the contrary, Yadea iGo is the worst electric bicycle type.

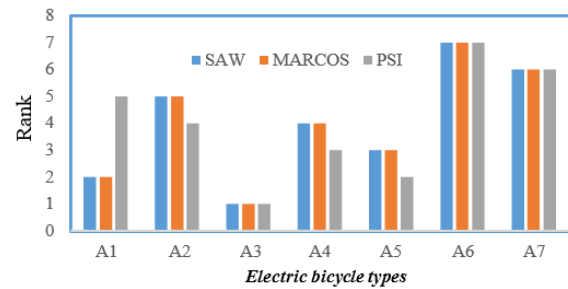


Fig. 2. Ranking electric bicycle types according to three different methods

4. CONCLUSION

When choosing an electric bicycle type, we need to consider about many factors such as the price of the bicycle, the charging time, the distance the bicycle can go after each charge, the speed of the bicycle, etc. This is a complicated thing to do and it is really easy to make mistakes if the choosing is done based on the subjective opinion of the customer only. To make sure that customers do not make mistakes, it is a need to use mathematical tools for electric bicycle type selection. Seven electric bicycle types which were mentioned in this study include M133 mini, M133 Sport 2022, Aima 133AM, Nijia – PA4, DK 133M, Yadea iGo and Yadea i3. Three mathematical methods used in this study are SAW method, MARCOS method and PSI method. The ranking results showed that Aima 133AM is the best type, in opposition, Yadea iGo is the worst type.

The alternatives were ranked while the weights of the criteria were equal. If the weights of the criteria were determined by another method (Entropy, *MEREC*, *ROC*, *RS*, ect.) or according to the customers opinions, the ranking results would be different. However, the method used in this study is believed to make the right choice when choosing the best alternative in accordance with each weighting method.

The criteria for evaluating electric bicycles used in this study are quantitative criteria. Some qualitative criteria have not been considered in this study such as battery type, color, driving safety, charging safety, etc. have not been mentioned in this study. Ranking electric bicycle types will be more complete when those criteria are considered. For qualitative criteria, using *PIPRECIA* (PIvot Pairwise RElative Criteria Importance Assessment) method [45] for determining the weights of the criteria is a solution that should be used.

REFERENCES

- [1] C. Zopounidis, M. Doumpos, Multiple Criteria Decision Making - Applications in Management and Engineering. *Springer*, 2017.
<https://doi.org/10.1007/978-3-319-39292-9>
- [2] B. Prasetyo, N. Baroroh, Fuzzy Simple Additive Weighting Method in the Decision Making of Human Resource Recruitment. *Lontar komputer: Jurnal Ilmiah Teknologi Informasi*, 7(3), 2016: 174-181.
<https://doi.org/10.24843/LKJITI.2016.v07.i03.p05>
- [3] N. Vafaei, R.R. Ribeiro, L.M. Camarinha-Matos, Assessing Normalization Techniques for Simple Additive Weighting Method. *Procedia Computer Science*, 199, 2022: 1229-1236.
<https://doi.org/10.1016/j.procs.2022.01.156>
- [4] W.S. Goodridge, Sensitivity Analysis Using Simple Additive Weighting Method. *International Journal of Intelligent Systems and Applications*, 8(5), 2016: 27-33.
<https://doi.org/10.5815/ijisa.2016.05.04>
- [5] I. Pangaribuan, A. Beniyanto, Multi-criteria decision-making method for procurement of goods and services auction system. *Journal of Engineering Science and Technology*, 2020(5), 2020: 26-32.
- [6] S. Mitra, S.S. Goswami, Application of Simple Average Weighting Optimization Method in the Selection of Best Desktop Computer Model. *Advanced Journal of Graduate Research*, 6(1), 2019: 60-68.
<https://doi.org/10.21467/ajgr.6.1.60-68>
- [7] L. Abdullah, N. Zamri, C. M. Goh, Application of Interval Type 2 Fuzzy SAW in Flood Control Project. *International Journal of Advances in Soft Computing and its Applications*, 11(3), 2019: 124-137.
- [8] M.D. Vujicic, M.Z. Papic, M.D. Blagojevic, Comparative Analysis of Objective Techniques for Criteria Weighing in Two MCDM Methods on Example of an Air Conditioner Selection. *Tehnika*, 67(3), 2017: 422-429.
<http://doi.org/10.5937/tehnika1703422V>
- [9] D. Ajay, M. Manivel, J. Aldring, Neutrosophic Fuzzy SAW Method and It's Application. *The International journal of analytical and experimental modal analysis*, 11(8), 2019: 881-887.
- [10] R.A. ZeinEldin, B.M. Abdullah, Comparing Two Multi-Criteria Approaches to Investigate Their Ability in Measuring Efficiency. *International Journal for Modern Trends in Science and Technology*, 3(2), 2017: 52-56.
- [11] F. Gokgoz, E. Yalcin, An Integrated Approach to the World Cup Teams Using Entropy based ARAS and SAW Methods. 25th *ISTANBUL Int'l Conference on Literature, Languages, Humanities & Social Sciences (ILLHSS-19)*, 5-6 December, 2019, Istanbul, pp.1-4.
<https://doi.org/10.17758/URUAE8.UH12194007>
- [12] M.I. Panjaitan, Simple Additive Weighting (SAW) method in Determining Beneficiaries of Foundation Benefits. *Jurnal Teknologi Komputer*, 13(1), 2019: 19-25.
- [13] P.D. Larasati, A. Irawan, Application For Lecturer Recruitment Using Simple Additive Weighting (SAW) Method Case Study: TanriAbeng University Jakarta. *Applied Information Systems and Management*, 3(1), 2020: 15-20.
<https://doi.org/10.15408/aism.v3i1.9184>
- [14] A. Loa, B. Daniawan, Tugiman, A. Basri, Comparing SAW and CPI Method in Decisions Systems Support to Evaluate Teachers Performance. *Bit-Tech*, 2(3), 2020: 121-130.
- [15] A. Cahyapratama, R. Sarno, Application of Analytic Hierarchy Process (AHP) and Simple Additive Weighting (SAW) Methods. *International Conference on Information and Communications Technology*, 6-7 March, 2018, Yogyakarta, Indonesia, pp.234-239
<https://doi.org/10.1109/ICOiACT.2018.8350707>

- [16] N. Dobrovolskiene, A. Pozniak, Simple Additive Weighting versus Technique for Order Preference by Similarity to an Ideal Solution: which method is better suited for assessing the sustainability of a real estate project. *Entrepreneurship and Sustainability Issues*, 8(4), 2021: 180-196.
[http://doi.org/10.9770/jesi.2021.8.4\(10\)](http://doi.org/10.9770/jesi.2021.8.4(10))
- [17] T.K. Biswas, S. Chaki, Applications of Modified Simple Additive Weighting Method in Manufacturing Environment. *International Journal of Engineering, Transactions A: Basics*, 35(4), 2022: 830-836.
<http://doi.org/10.5829/ije.2022.35.04a.23>
- [18] Z. Stevic, D. Pamucar, A. Puska, P. Chatterjee, Sustainable supplier selection in healthcare industries using a new MCDM method: Measurement Alternatives and Ranking according to COmpromise Solution (MARCOS). *Computers & Industrial Engineering*, 140, 2020: 106231.
<https://doi.org/10.1016/j.cie.2019.106231>
- [19] D.D. Trung, Multi-criteria decision making under the MARCOS method and the weighting methods: applied to milling, grinding and turning processes. *Manufacturing review*, 9(3), 2022: 1-13.
<https://doi.org/10.1051/mfreview/2022003>
- [20] A. Puska, I. Stojanovic, A. Maksimovic, N. Osmanovic, Project Management Software Evaluation by Using the Measurement of Alternatives and Ranking According to Compromise Solution (MARCOS) Method. *Operational Research in Engineering Sciences: Theory and Applications*, 3, 2020: 89-102.
<https://doi.org/10.31181/oresta2001089p>
- [21] M. Bakır, O. Atalık, Application of Fuzzy AHP and Fuzzy MARCOS Approach for the Evaluation of E-Service Quality in the Airline Industry. *Decision Making: Applications in Management and Engineering*, 4(1), 2021: 127-152.
<https://doi.org/10.31181/dmame2104127b>
- [22] M. Bakır, S. Akan, E. Ozdemir, Regional aircraft selection with fuzzy pipreca and fuzzy MARCOS: A case study of the Turkish airline industry. *Facta universitatis, Series: Mechanical Engineering*, 19(3), 2021: 423-445.
<https://doi.org/10.22190/FUME210505053B>
- [23] A. Mesic, S. Miskic, Z. Stevic, Z. Mastilo, Hybrid MCDM solutions for evaluation of the logistics performance index of the Western Balkan countries. *Economics - Innovative and Economic Research*, 10(1), 2022: 13-34.
<https://doi.org/10.2478/eoik-2022-0004>
- [24] M.B. Bouraima, Z. Stevic, I. Tanackov, Y. Qiu, Assessing the performance of Sub-Saharan African (SSA) railways based on an integrated Entropy-MARCOS approach. *Operational Research in Engineering Sciences: Theory and Applications*, 4(2), 2021: 13-35.
<https://doi.org/10.31181/oresta20402013b>
- [25] E. Mahmutagic, Z. Stevic, Z. Nunic, P. Chatterjee, I. Tanackov, An integrated decision-making model for efficiency analysis of the forklifts in warehousing systems. *Facta universitatis, Series: Mechanical Engineering*, 19(3), 2021: 537-553.
<https://doi.org/10.22190/FUME210416052M>
- [26] R. Chattopadhyay, S. Chakraborty, S. Chakraborty, An integrated D-MARCOS method for supplier selection in an iron and steel industry. *Decision Making: Applications in Management and Engineering*, 3(2), 2020: 49-69.
<https://doi.org/10.31181/dmame2003049c>
- [27] K. Maniya, M.G. Bhatt, A selection of material using a novel type decision-making method: Preference selection index method. *Materials and Design*, 31(4), 2010: 1785-1789.
<https://doi.org/10.1016/j.matdes.2009.11.020>
- [28] E.B. Sari, Measuring The Performances of the Machines Via Preference Selection Index (PSI) Method and Comparing Them with Values of Overall Equipment Efficiency (OEE). *Izmir Journal of Economics*, 34(4), 2019: 573-581.
<https://doi.org/10.24988/ije.2019344859>
- [29] E.B. Sari, Recovery alternatives decision by using fuzzy based preference selection index method. *Scientific Journal of Logistics*, 16(1), 2020: 171-181.
<http://doi.org/10.17270/J.LOG.2020.386>
- [30] N. Arifi, P.H. Saputro, Selection Index (PSI) Method in Developing a Student Scholarship Decision Support System. *International Journal of Computer and Information System*, 3(1), 2022: 12-16.
<https://doi.org/10.29040/ijcis.v3i1.55>
- [31] R. Yadav, Fabrication, characterization, and optimization selection of ceramic particulate reinforced dental restorative composite materials. *Polymers and Polymer Composites*, 30, 2022: 1-10.
<https://doi.org/10.1177/09673911211062755>
- [32] R. Attri, S. Grover, Application of preference selection index method for decision making over the design stage of production system life

- cycle. *Journal of King Saud University – Engineering Sciences*, 27(2), 2015: 207-216.
<https://doi.org/10.1016/j.jksues.2013.06.003>
- [33] R.V. Prasad, C. M. Rao, B.N. Raju, Application of Preference Selection Index (PSI) Method for the Optimization of Turning Process Parameters. *International Journal of Modern Trends in Engineering & Research*, 5(5), 2018: 140-144.
- [34] N.H. Phan, N.N. Vu, S. Shirguppikar, N.T. Ly, N.C. Tam, B.T. Tai, L.T.P. Thanh, Multi-criteria decision making in electrical discharge machining with nickel coated aluminium electrode for titanium alloy using preferential selection index. *Manufacturing review*, 9(13), 2022: 1-10.
<https://doi.org/10.1051/mfreview/2022010>
- [35] D.H. Tien, D.D. Trung, N.V. Thien, N.T. Nguyen, Multi-objective optimization of the cylindrical grinding process of SCM440 steel using preference selection index method. *Journal of Machine Engineering*, 21(3), 2021: 110-123.
<https://doi.org/10.36897/jme/141607>
- [36] G. Akyuz, S. Aka, An Alternative Approach for Manufacturing Performance Measurement: Preference Selection Index (PSI) Method. *Business and Economics Research Journal*, 6(1), 2015: 63-77.
- [37] K. Maniya, M.G. Bhatt, A selection of material using a novel type decision-making method: Preference selection index method. *Materials and Design*, 31(4), 2010: 1785-1789.
<https://doi.org/10.1016/j.matdes.2009.11.020>
- [38] L.T. Sianturi, M. Mesran, E. Purba, R. Rahim, Implementation of Preference Selection Index Method In Determination of People's Business Credit Receiver. *Proceedings of the Third Workshop on Multidisciplinary and Its Applications*, 11-14 December, 2019, Medan, Indonesia, pp.1-12.
<http://dx.doi.org/10.4108/eai.11-12-2019.2290817>
- [39] S.H. Sahir, J.Afriani, G. Ginting, B. Fachri, D. Siregar, R. Simbolon, L. Lindawati, M. Syarizal, S. Aisyah, M. Mesran, F. Fadlina, J. Simarmata, The Preference Selection Index Method in Determining the Location of Used Laptop Marketing. *International Journal of Engineering & Technology*, 7(3-4), 2018: 260-263.
- [40] M. Stanujkic, D. Stanujkin, D. Karabasevic, C. Sava, G. Popovic, Comparison of tourism potentials using preference selection index method. *QUAESTUS Multidisciplinary Research Journal*, 2020(16), 2020: 177-187.
- [41] S. Jian, S.Ying, Preference Selection Index Method for Machine Selection in a Flexible Manufacturing Cell. *MATEC Web of Conferences*, 139, 2017: 00167.
<https://doi.org/10.1051/mateconf/20171390167>
- [42] S. Kusumadewi, S. Hartati, A. Harjoko, R. Wardoyo, Fuzzy Multi-Attribute Decision Making (FUZZY MADM). *Yogyakarta: Penerbit Graha Ilmu*, 2006.
- [43] <https://xedienvietthanh.com/tin-tuc/top-7-mau-xe-dap-dien-dep-duoc-chon-mua-nhieunhat-2021/> (accessed: 12/12/2022)
- [44] D. Ioan, G. F. Florin, M. J. Manolescu, Fuzzy Logic Is Not Fuzzy: World-renowned Computer Scientist Lotfi A. Zadeh. *International Journal of Computers Communications & Control*, 12(6), 2017: 748-789.
<https://doi.org/10.15837/IJCCC.2017.6.3111>
- [45] D. Stanujkić, D. Karabašević, G. Popović, Ranking alternatives using PIPRECIA method: A case of hotels'website evaluation. *Journal of Process Management and New Technologies*, 9(3-4), 2021: 62-68.
<https://doi.org/10.5937/jouproman2103062S>